
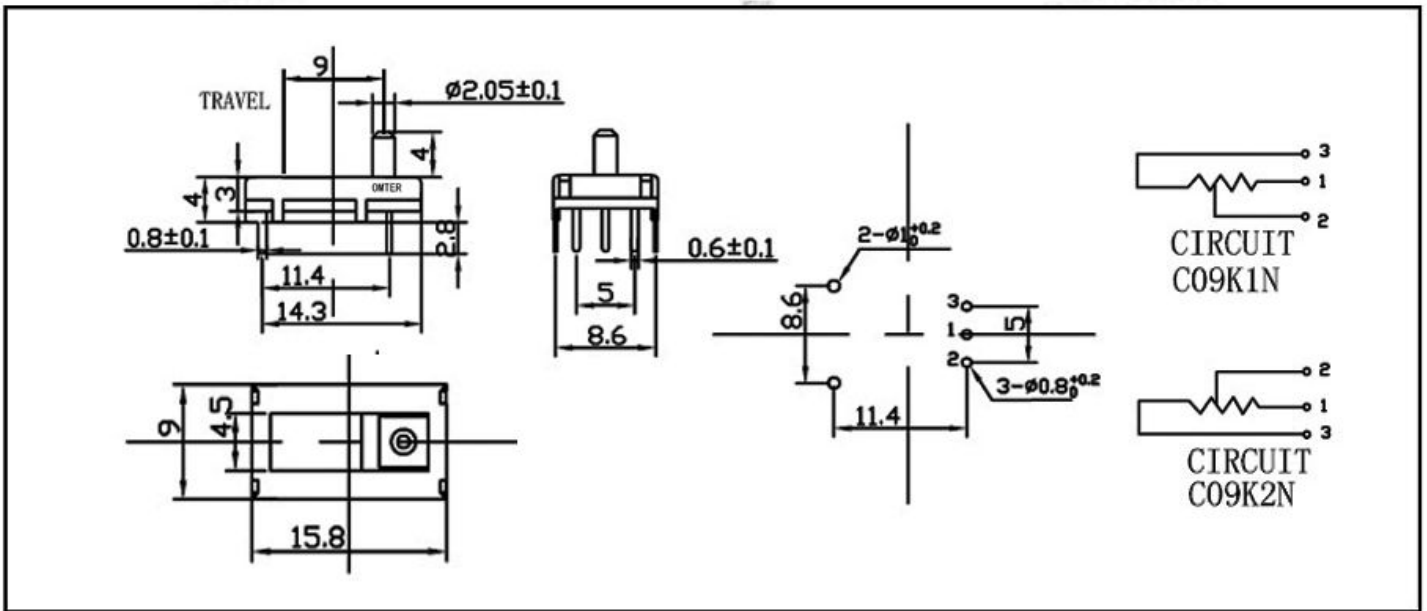


C09K1N

C09K2N



参数特性General Specification:

全阻抗值: Total Resistance	500Ω~1MΩ
全阻抗值容许差: Total Resistance tolerance	±20%
残留阻值: Residual resistance	Term. 1~2: Less than 100Ω
抵抗变化特性: Resistance Tape	B
定格电力: (W) Ratings Power	B: Dual 0.005 Except B: Dual 0.001
额定电压: (V) Rated voltage	B: 50 Except B: 25
绝缘抵抗: Insulation Resistance	50MΩ min. at 100V DC
耐电压: Voltage proof	1minute at 100V AC
滑动寿命: Sliding Life	100,000 cycles Min
滑动力矩: Operating Force	20gf.cm~40gf.cm
滑动止动强度: Lever stopper strength	2.5Kgf.cm(2mm point from mounting surface)
滑动柄晃强度: Lever wobble	2(2 x L)/25mm Max (L: Lever length both sides)
滑动杂音: Slider noise	未滿100mv less than 100mv